


SLI 230CRP

SL-series plug-in relay

Main features

- Solid state input relay
- cULus Listed, CE (EMC and LVD)
- Integrated status LED
- Used with proximity switches

Functional block diagram

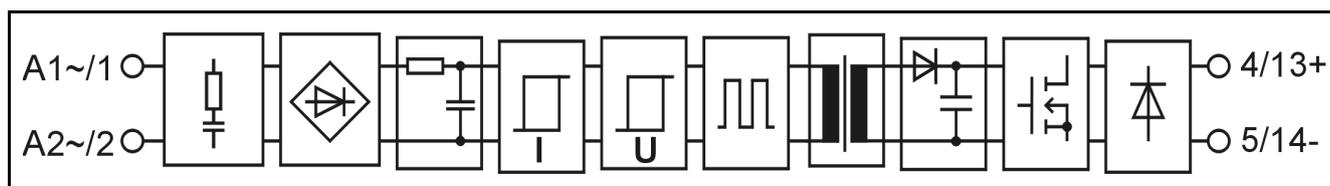

Main specifications

Breakdown voltage I/O	minimum	4300	VAC rms
Air/creepage distances I/O	minimum	8	mm
Capacitance I/O	typical	3	pF
Material of the casing	PBT	UL 94V-0	
Colour of the casing	Orange		
Weight	typical	40	g
Temperature range:			
Storage	range	-40...+70	°C
Operation	range	-40...+70	°C

Electrical specifications ($T_A = 25\text{ °C}$)

Primary				Secondary			
Input voltage	nominal	220...240	VAC	Load voltage	minimum	0	VDC
Input current at nominal voltage	typical	6,5	mA		maximum	60	VDC
	maximum	7,5	mA	Load current	maximum	50	mA
Input voltage range (abs.)	minimum	190	VAC	Voltage drop at 50 mA load	typical	0,2	V
	maximum	265	VAC		maximum	0,4	
Input impedance	typical	35	kΩ	Switch-on delay	typical	40	ms
Switch-on voltage *	typical	160	VAC		maximum	-	
	maximum	190	VAC	Switch-off delay	typical	40	ms
Switch-off voltage	typical	140	VAC		maximum	-	
	minimum	120	VAC	Leakage current (off-state)	maximum	1	μA
Switch-off current	typical	3,5	mA				
Cable capacitance	typical	80	nF				

Cable capacitance is a capacitance which is not keeping the relay in on-state (typical value at 230 VAC) or total current 3,5 mA (typical).

Ambient temperature (T_A) means the temperature immediate in vicinity of relays, where the air flow meets the relays.

* When the operational temperature range is $-25\text{ °C} \dots +70\text{ °C}$ the switch-on voltage is 195 VAC maximum (230 VAC -15 %). At -40 °C the switch-on voltage is 207 VAC maximum (230 VAC -10 %).

Limitations

Ambient temperature (T_A)	Limitations
-40 °C...+40 °C	No limitations
+40 °C...+55 °C	Only every other relay should be in on-state when assembled side by side.
+55 °C...+70 °C	If relays are most of the time on, there should be a gap in both sides at least 12,5 mm. In multichannel mounting bases every other place should be empty.

These limitations apply when assembled to the horizontal rail. If assembled to the vertical rail, must be taken care that the relays do not heat up too much.

Derating when switching inductive loads

This relay is meant for PLC inputs and similar loads. A clamp diode with the load must be used when switching inductive loads.

Fusing

To protect relay against short circuit and overload a fast fuse with the correct rating for the load and the capacity of the relay should be chosen. Note that when overload current is not large it is possible that the fuse will not protect the relay because of the tolerance on the fuse rating.

Assembling

Can be assembled to all MIS 1... -mounting sockets and MB/MBS 8/16... -mounting bases. Fixing with a captive screw. The recommended installation is to the horizontal rail for better cooling of the relays.

