

FA-50

Transparent front cover

General data


Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Module width	fig. 1
Weight	5 g
Housing material	PC

Product references

Types	Product reference
Transparent front cover	FA-50



fig. 1. Dimensions (mm)



FS-C

Transparent front cover

General data


Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Module width	fig. 1
Weight	5 g

Product references

Types	Product reference
Transparent front cover, 5 psc	FS-C/5 (BEUTEL/UNIT 5 STK/PCS)



fig. 1. Dimensions (mm)



FZ-50L

Front panel mounting set | Socket S3-L | Retaining clip

General data


Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Module width	fig. 1
Weight	40 g
Housing material	PC

Product references

Types	Product reference
Front panel mounting set	FZ-50L



fig. 1. Dimensions (mm)

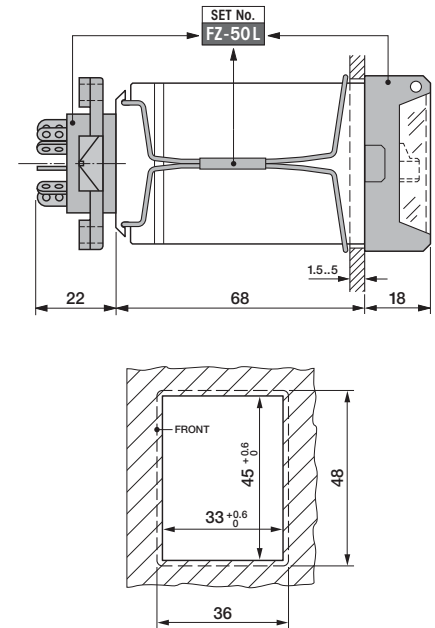

HF-32

Retaining clip | Steel

General data


Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Module width	fig. 1
Weight	2 g
Housing material	Steel

Product references

Types	Product reference
Retaining clip	HF-32



fig. 1. Dimensions (mm)

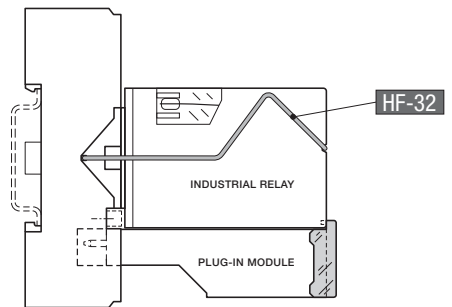

HF-33

Retaining clip | Steel

General data

Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Module width	fig. 1
Weight	2 g
Housing material	Steel

Product references

Types	Product reference
Retaining clip	HF-33


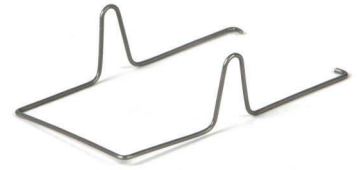


fig. 1. Dimensions (mm)

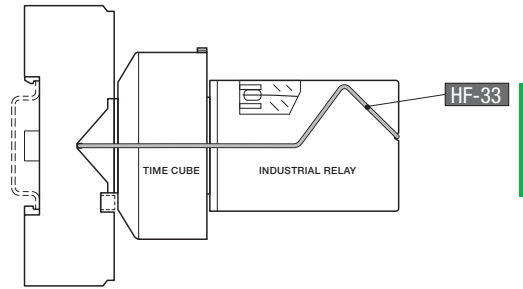

HF-50

Retaining clip | Steel

General data

Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Module width	fig. 1
Weight	2 g
Housing material	Steel

Product references

Types	Product reference
Retaining clip	HF-50


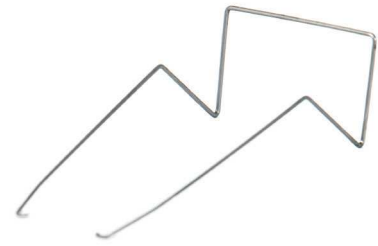


fig. 1. Dimensions (mm)

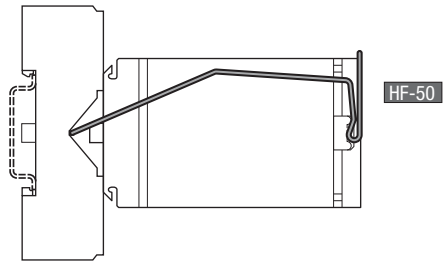


SP-01

Potentiometer | 100 kΩ | 1 MΩ | 0.2 W

General data

Ambient temperature storage	-40 ... 85 °C
Ambient temperature operation	-25 ... 60 °C
Conductor cross section	2.5 mm ²
Nominal screw torque	0.5 Nm
Module width	fig. 1
Weight	85 g
Protection degree	IP 65

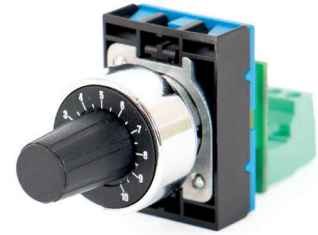

Product references

Types	Product reference	100k	1M
Potentiometer	SP-01/	✓	✓

"..." list resistance to complete product references.

fig. 1. Dimensions (mm)

