

## High Inrush Relays



| Application                                   | Types  | Contacts    | AC ratings   | Socket |
|---|--------|-------------|--------------|--------|
| Power relay for high inrush current           | C7-W1x | ✓✓          | 10 A / 250 V | S7     |
| Hum-free installation contactor               | RIC20  | ✓✓✓ ✓✓✓ ✓✓✓ | 20 A / 400 V | DIN    |
| Universal time relay for high inrush currents | CIM14  | ✓✓          | 16 A / 250 V | DIN    |
| Power relay for high inrush currents          | CHI14  | ✓✓          | 16 A / 250 V | DIN    |

## OFTEN UNDERESTIMATED: HIGH INRUSH CURRENTS IN LIGHTING TECHNOLOGY



Lighting technology has been changing for some years now. Traditional light bulbs are rapidly being replaced with energy-efficient light sources such as fluorescent lamps and LEDs. All of these lamps have one thing in common: they require electronic control gear (ECG). The contacts on conventional relays wear out very quickly if used for triggering these devices.

Pre-devices such as relays and contactors are placed under an increased strain when switching ECGs and energy-saving lamps with integrated ECGs. This has to be taken into consideration when planning a new system. Even when refitting the lighting technology in an existing system, the new features have to be accounted for by adapting switching components to suit the new consumers. Be aware, however, that this issue affects more than just light sources. The structure of modern switching power supplies in many devices means that this problem is also found in other areas of electronics and installation. Modern devices require a low operating current but a very high inrush current, which has to be taken into account when designing switching devices.

### ECG inrush processes

ECGs and switching power supplies allow for the inrush current to peak at the exact point the device is switched on. High inrush currents are created by the capacitors used in ECGs after the rectifier for smoothing out the current and as an energy store. If a capacitor is entirely discharged, a charging current, similar to an electrical short, may occur during the first micro-seconds of the inrush process.

Our example of an ECG for  $2 \times 24\text{W}$  T5 fluorescent lamps shows that peak currents of more than  $22\text{A}$  – measured during the phase maximum – and a half-life of  $305\mu\text{s}$  may easily occur. During normal operation, this ECG absorbs a current of merely  $220\text{mA}$ . The inrush current is therefore 100 times higher than the nominal current in this example. The data sheets of renowned ECG manufacturers show, however, that inrush currents as high as  $60\text{A}$  may occur – with a lamp output of just  $100\text{W}$ . In daily life, complete lighting groups are most commonly switched on together, thus cumulating the effect of the high inrush current even further.

### Great demand placed on relay performance

Common relay types use silver alloys such as silver-nickel (AgNi) for their contacts. They are not designed for inrush currents that are much higher than the nominal current. The thermic loads could weld the contacts shut after just a few switching-cycles. The result: the consumer can no longer be switched off.

An arc is created at the point the contact blades of a relay near each other during the switching process. The contact bounce found in mechanical contacts increases this arc even further. This effect is primarily influenced by the level and half-life of the inrush current. The temperatures created during the process can easily exceed the melting point of the contact alloy, thus leading to the contact blades being welded together.

The information provided in the data sheets of relay and consumer manufacturers is a first point of reference when calculating the correct specifications of a relay. They often disclose the inrush currents and peak times.

Disproportionately high inrush currents create an exceptionally high risk of welding, which is the reason why the contact material must be able to meet increased demands.

## Relays for high inrush currents up to 800 A

Comat developed the high power relay CHI14 especially for inrush currents up to 800 A.

The CHI14 has a tungsten ( $W/AgSnO_2$ ) pre-contact with a higher melting point than ordinary silver alloys. This facilitates the switching of currents up to 800 A for 200  $\mu$ s and 165 A for 20 ms. The switching during zero flow is another special feature of this high-tech product.

This significantly reduces the inrush current. The  $2 \times 24$  W T5 ECG is an impressive example: Fig. 1 shows a inrush current without zero flow switching of 22 A. Thanks to the zero flow switching at almost 3.5 A, the inrush current is 85% lower in Fig. 2.


With a 16 A nominal current and a DIN housing with one module width, the CHI14 is suitable for installation in distributors and upgrading existing installations. It is also ideal for use in living areas as its switching process is almost entirely noiseless.

The multi-function time relay CIM14 of similar build features an additional 10 time functions such as stepping switches and automatic light switches in hallways.


The RIC series contactors have large-surface contacts that disconnect twice. Thanks to  $AgSnO_2$  contacts, the RIC 40 and RIC63 types can switch currents up to 150 A for 100 ms. The RAC versions with on-off function and the RBC stepping switches are also interesting options for installation.

The movable relay C7-W10 is ideal for industrial applications. The tungsten ( $W/AgSnO_2$ ) pre-contact makes it possible to handle inrush currents up to 500 A for 2.5 ms.

1

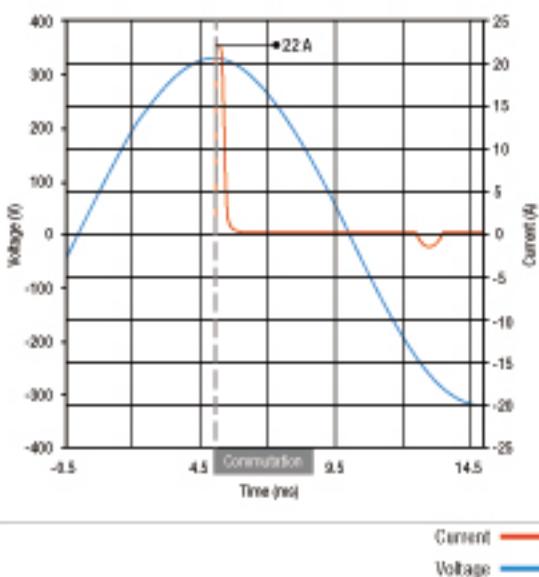

2

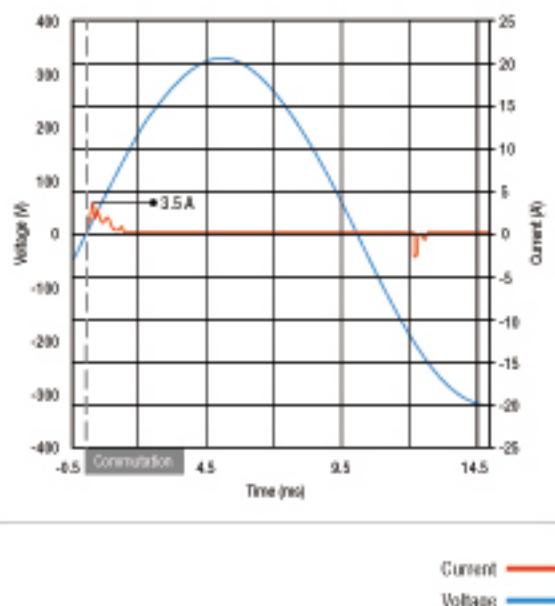

**Type:****C7-W1x/ ... V**Power relay for high inrush current.  
1 pole normally open**Maximum contact load:**

10 A/250 V AC

6 A/250 V AC5a/b

**Recommended minimum contact load:**

10 mA/10 V

**Contacts**

| Material                        | Standard | Code 0 | AgNi/W     |
|---------------------------------|----------|--------|------------|
| Rated current                   |          |        | 10 A       |
| Switch-on current max. (2,5 ms) |          |        | 500 A      |
| Switching voltage max.          |          |        | 250 V      |
| AC load (Fig 1)                 |          |        | 2,5 kVA    |
| DC load                         |          |        | see fig. 2 |

**Coil**

|                 |                                  |
|-----------------|----------------------------------|
| Coil resistance | see table; tolerance: $\pm 10\%$ |
| Pick-up voltage | $\leq 0,8 \times U_{N}$          |
| Release voltage | $\geq 0,1 \times U_{N}$          |
| Nominal power   | 1,5 VA (AC)/1,5 W (DC)           |

**Coil table**

| VAC | $\Omega$ | mA  | VDC | $\Omega$ | mA  |
|-----|----------|-----|-----|----------|-----|
| 24  | 153      | 62  | 12  | 99       | 121 |
| 48  | 611      | 31  | 24  | 398      | 61  |
| 115 | 3K6      | 13  | 48  | 1K6      | 32  |
| 230 | 14K6     | 6,5 | 110 | 8K       | 14  |

**Insulation**

|                                |                          |
|--------------------------------|--------------------------|
| Contact open                   | Volt rms, 1 min          |
| Contact/coil                   | 1000 V                   |
| Insulation resistance at 500 V | 2,5 kV                   |
| Insulation, IEC 61810-1        | $\geq 1 \text{ G}\Omega$ |

**Specifications**




|                                       |                                      |
|---------------------------------------|--------------------------------------|
| Ambient temperature operation/storage | -40 (no ice)...+60 °C / -40...+80 °C |
| Pick-up time/bounce time              | 20 ms/ $\leq 3$ ms                   |
| Release time/bounce time              | 10 ms/ $\leq 1$ ms                   |
| Mechanical life ops                   | AC: 10 Mill./DC: 20 Mill.            |
| DC voltage endurance at rated load    | $\geq 100000$ switching cycles       |
| Switching frequency at rated load     | $\leq 1200$ /h                       |
| Protection class                      | IP40                                 |
| Weight                                | 43 g                                 |

**Standard types**VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240)  
LEDC7-W10/AC ... V  
C7-W10X/AC ... VVDC 12, 24, 48, 110  
LEDC7-W10/DC ... V  
C7-W10X/DC ... V  
C7-W10DX/DC ... V  
C7-W10FX/DC ... V

Polarity and free wheeling diode

C7-W10BX/UC ... V

AC/DC bridge rectifier 24 V, 48 V, 60 V

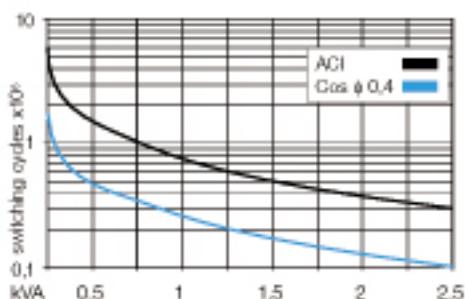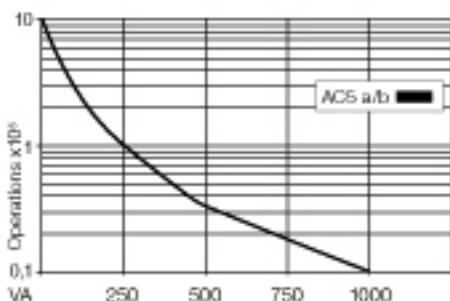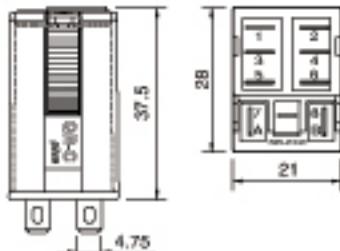**Connection diagram****Fig. 1 AC voltage endurance****Fig. 2 AC voltage endurance****Dimensions [mm]**

\* ... Enter the voltage for full type designation

**Accessories**Socket:  
Optional accessories (blanking plug): S7-M, S7-I/O, S7-L, S7-P, S7-P0  
S9-NP, S9-OP**Technical approvals, conformities**

IEC 61810; EN 60947

Installation Contactor  
**RIC20**

**20 A, AC/DC control voltage, silent operation**  
DIN rail mounting according to DIN 43 880



Type: RIC20-xxx/ ...V

Hum-free installation contactor, 2 contacts, 2 NO, 1 NO+1 NC, 2 NC types available

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Rated operational power          | 4 kW / 230 V AC-1, 0.5 A / 220 V DC-1 |
| Recommended minimum contact load | 10 mA / 24 V                          |

**Contacts**

|   |                                  |
|---|----------------------------------|
| Material                                | AgNi                             |
| Rated operational current               | 20 A                             |
| Max. inrush current (100ms)             | 50 A                             |
| Max. switching voltage                  | 400 V                            |
| Max. AC load AC-1, AC-7a                | 4 kW / 230 V                     |
| AC-3                                    | 1.3 kW / 230 V (NO contact only) |
| Max. DC load 24 V / 220 V DC-1 (Fig. 1) | 480 W / 130 W                    |

**Control input  $V_n =$**

|                             | UC 24 V       | UC 36 V       | UC 230 V    |
|-----------------------------|---------------|---------------|-------------|
| Operating voltage range [V] | 20.4 ... 26.4 | 30.6 ... 39.6 | 195 ... 253 |
| Typ. pick up voltage [V]    | 17            | 25            | 160         |
| Typ. release voltage [V]    | 7             | 11            | 70          |
| Power consumption [W]       | ≤ 2.5         | ≤ 2.5         | ≤ 2.5       |
| Inductive turn-off voltage  | None          | None          | None        |
| Surge immunity EN 61000-4-5 | 2 kV          | 2 kV          | 2 kV        |

**Insulation**

|                                 |        |
|---------------------------------|--------|
| Rated insulation voltage        | 230 V  |
| Rated impulse withstand voltage | 4 kV   |
| Min. clearance of open contact  | 3.6 mm |

**General Specifications**

|  |   |
|--|---|
| Ambient temperature                                | -30 ... 80 °C   |
| storage  | -5 ... 55 °C  |
| operation, Spacing after 2 contactors side by side | -5 ... 40 °C  |
| operation, Spacing after 3 contactors side by side | -5 ... 40 °C  |
| Pick-up time                                       | 15 ... 45 ms  |
| Release time                                       | 20 ... 50 ms  |
| Mechanical life                                    | ≥ 3 x 10 <sup>6</sup> operations                      |
| AC voltage endurance at rated load AC-3, AC-7b     | ≥ 3 x 10 <sup>6</sup> operations                      |
| DC voltage endurance at rated load DC-1            | 10 <sup>5</sup> operations                            |
| Operating frequency at rated load DC-1             | ≤ 300 operations / h                                  |
| Operating frequency at rated load AC-1             | ≤ 600 operations / h                                  |
| Conductor cross section coil / contacts            | Stranded wire 2.5 mm <sup>2</sup> / 6 mm <sup>2</sup> |
| Max. screw torque coil / contacts                  | 0.6 Nm / 1.2 Nm                                       |
| Ingress protection degree                          | IP 20   |
| Weight   | 140 g   |

**Standard types**

|   |           |                   |
|---|-----------|-------------------|
| UC (AC / DC) 50 / 60 Hz, 24, 36, 230                | 2NO       | RIC20-200/UC ...V |
| " ... " enter the voltage for full type designation | 1NO + 1NC | RIC20-110/UC ...V |
|   | 2NC       | RIC20-020/UC ...V |

**Accessories**

|                |             |
|----------------|-------------|
| Sealing cover: | RIC-SEAL 20 |
| Spacer:        | RIC-DIST    |

| Samples of lamp loads                           | Number of lamps |
|---|-----------------|
| Incandescent lamps 230 V / 100 W                | 20              |
| Fluorescent lamps not corrected 230 V / 36 W    | 17              |
| Fluorescent lamps electronic ballast units 36 W | 15              |

Find more information about RIC, PAC, RBC series on pages 117 – 127.

**Mounting Information**


If multiple contactors are mounted side by side, spaces (RIC-DIST) have to be inserted for the purpose of heat dissipation.

**Example:** Ambient temperature up to 40°C: 1 spacer after 3 PAC // 40...55°C: 1 spacer after 2 PAC.



1

**Connection diagram**

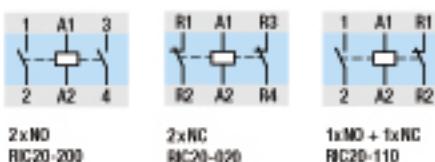

**Coil circuit**





Fig. 1 DC load limit curve DC1



**Dimensions [mm]**

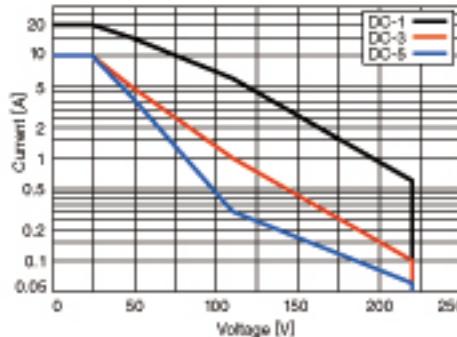

**Technical approvals, conformities**



IEC/EN 60947-4-1, VDE 0660

IEC/EN 60947-5-1

IEC/EN 61095, VDE 0637

# CIM14

Time relay with NO contact for high inrush currents up to 800 A  
8 time functions + stepping function, ON-OFF switch, 50 ms ... 60 h,  
DIN Rail mounting according to DIN 43 880




## Type: CIM14/UC24-240V

Sophisticated multifunction time relay, 1 NO power contact for high inrush currents up to 800 A with zero crossing switching (50/60 Hz). 8 time functions, stepping function and service function ON/OFF, time ranges: 50 ms ... 60 h, multifunction LED state indicator, suitable for any time-control application and also staircase lighting, Light-switch neon lamp current absorption on input B1, Manual switching function for maintenance, emergency, etc., 16.6 Hz power supply applications. Railway version available.

|   |                              |
|---|------------------------------|
| <b>Maximum contact load</b>             | 16 A / 250 V AC-1 384 W DC-1 |
| <b>Recommended minimum contact load</b> | 100 mA / 12 V                |

## Time functions and related connection diagrams (Function diagrams: refer to page 152)

The functions are selectable by rotary switch

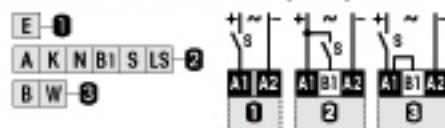

LED function table:

| LED            | Relay | Time run |
|----------------|-------|----------|
| OFF            | OFF   | NO       |
| Continuous ON  | ON    | NO       |
| Short blinking | OFF   | YES      |
| Long blinking  | ON    | YES      |

## Time data

|  |   |
|--|---|
| 7 partial time ranges, $t_{max}$ (rotary switch) | 0.6, 6, 60 s / 6, 60 min / 6, 60 h                        |
| Fine adjustment range (rotary knob)              | 1 min ... $t_{max}$ 0.5 ... 6                             |
| Time range tolerance                             | $t_{min} \pm 5\% \dots +0\% / t_{max} \pm 0\% \dots +5\%$ |
| Repetition accuracy                              | $\pm 0.1\%$ or DC: 2 ms / AC: 10 ms                       |
| Response time, power on, on A1                   | $\leq 45$ ms  |
| Min. trigger pulse on B1                         | 20 ms (AC / DC)   |
| Reset time B1 (AC/DC)                            | $\leq 30$ ms  |
| Voltage failure buffering (50 / 60 Hz)           | $\geq 20$ ms  |

## Contacts

|  |                        |
|--|------------------------|
| Material                                   | W / AgSnO <sub>2</sub> |
| Rated operational current at 40 °C / 60 °C | 16 A / 13 A            |
| Max. inrush current                        | 165 A / 20 ms          |
|  | 800 A / 200 µs         |
| Max. switching voltage AC-1                | 250 V                  |
| Max. AC load AC-1 (Fig. 1)                 | 4 kVA                  |
| Max. DC load DC-1 24 V                     | 384 W                  |

## Power supply- and control input

|  |                            |
|--|----------------------------|
| Nominal voltage (A1, B1)                 | UC 24-240 V (UC = AC / DC) |
| Operating voltage range                  | 16.8 ... 250 V             |
| Power consumption                        | 1.2 VA / 0.43 W            |
| Frequency range                          | 16 ... 60 Hz               |
| Allowed DC residual current into B1      | $\leq 0.5$ mA              |
| AC Neon lamp residual current into B1    | $\leq 10$ mA               |
| Trigger threshold voltage on B1, AC / DC | 15 / 17 V                  |

## Insulation

|   |                    |
|---|--------------------|
| Test voltage open contact                       | 1 kVrms 1 minute   |
| Test voltage between contacts and control input | 2.5 kVrms 1 minute |

## General Specifications

|  |   |
|--|---|
| Ambient temperature storage /operation | -40 ... 85 °C / -40 ... 60 °C                               |
| Mechanical life of contact             | $5 \times 10^6$ operations                                  |
| Conductor cross section                | Stranded wire 2.5 mm <sup>2</sup> , 2 x 1.5 mm <sup>2</sup> |
| Ingress protection degree              | IP 20   |
| Max. screw torque                      | 0.4 Nm  |
| Housing material / weight              | Lexan / 70 g  |

## Standard types

UC (AC/DC) 15...60 Hz

CIM14/UC24-240V



## Connection diagram




Fig.1 AC voltage endurance



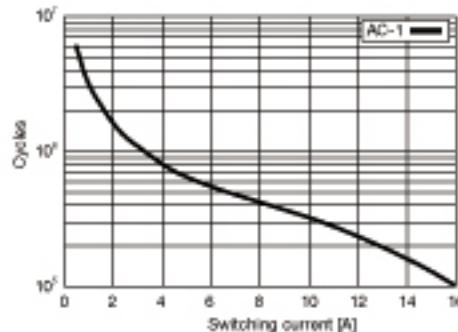


Fig. 2 DC load limit curve

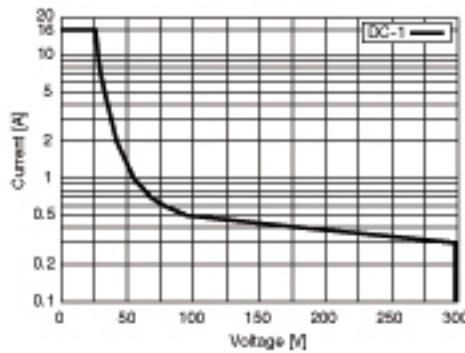

## Dimensions [mm]



## Technical approvals, conformities

EN 50155, EN 60730

# CHI14

**Power relay for high inrush currents up to 800 A  
DIN Rail mounting according to DIN 43 880**



## Type: CHI14/UC24-240V

The CHI14 is a power relay for all applications effecting high inrush currents up to 800 A such as electronic control gears of energy saving lamps, power supplies of the latest LED lights and switching supplies of industrial components. These loads show an inrush current up to 250 times of their nominal current.

The CHI14 is equipped with a low noise operating NO contact with a nominal current up to 16 A and complies with the applicable DIN standards 43880 with installation dimension of 17.5 mm (1 module width).

|   |                              |
|---|------------------------------|
| <b>Maximum contact load</b>             | 16 A / 250 V AC-1 384 W DC-1 |
| <b>Recommended minimum contact load</b> | 100 mA / 12 V                |

## Contacts

|  |                        |
|--|------------------------|
| Material                                   | W / AgSnO <sub>2</sub> |
| Rated operational current at 40 °C / 60 °C | 16 A / 13 A            |
| Max. Inrush current                        | 165 A / 20 ms          |
|  | 800 A / 200 µs         |
| Max. switching voltage AC-1                | 250 V                  |
| Max. AC load AC-1 (Fig.1)                  | 4 kVA                  |
| Max. DC load DC-1 24 V /                   | 384 W                  |

## Power supply- and control input

|                          |                                   |
|--------------------------|-----------------------------------|
| Nominal voltage (A1, B1) | <b>UC 24-240 V (UC = AC / DC)</b> |
| Operating voltage range  | 16.8 ... 250 V                    |
| Power consumption        | 1.2 VA / 0.43 W                   |
| Frequency range          | 16 ... 60 Hz                      |

## Insulation

|   |                    |
|---|--------------------|
| Test voltage open contact                       | 1 kVrms 1 minute   |
| Test voltage between contacts and control input | 2.5 kVrms 1 minute |

## General Specifications

|  |   |
|--|---|
| Ambient temperature storage /operation | -40 ... 85 °C / -40 ... 60 °C                               |
| Mechanical life of contact             | 5 x 10 <sup>8</sup> operations                              |
| Conductor cross section                | Stranded wire 2.5 mm <sup>2</sup> , 2 x 1.5 mm <sup>2</sup> |
| Ingress protection degree              | IP 20   |
| Max. Screw torque                      | 0.4 Nm  |
| Housing material / weight              | Lexan / 70 g  |


## Standard types

**UC (AC/DC) 15...60 Hz**


**CHI14/UC24-240V**




## Connection diagram




**Fig.1 AC voltage endurance**

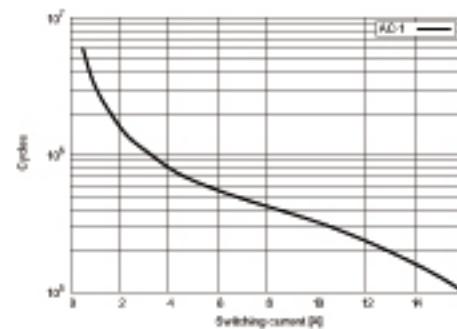

**Fig. 2 DC load limit curve**

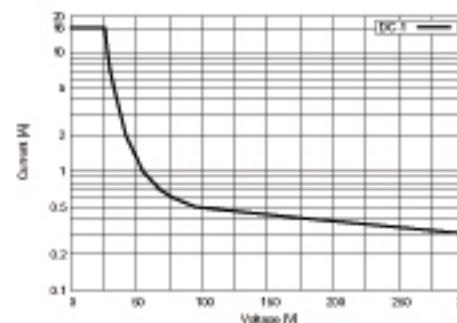

## Dimensions [mm]



## Technical approvals, conformities

EN 50155, EN 60730