


Datasheet

Surge protection for power supply systems

Class I (T1) Lightning Current Arresters / IsoPro

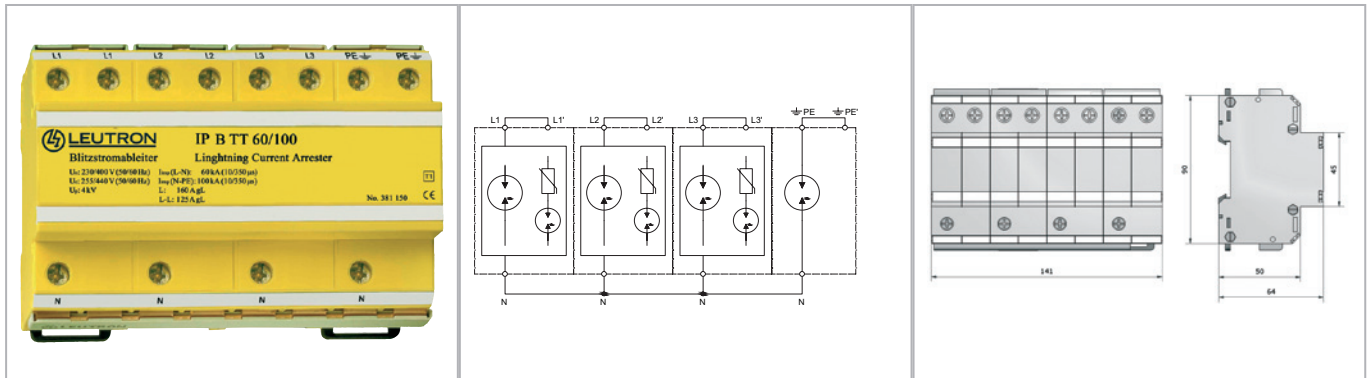

Multi-pole lightning current arrester for 3-phase TT and TN-S systems.

• Optional remote signalling contact (FM)

Technical Data	IP B TT 60/100	
Nominal alternating voltage	UN	230/400 V~
Max. continuous operating voltage AC	Uc	255 V~
Insulation resistance	Risol	> 10 GΩ
Protection level at 100% lightn. imp. sparkover voltage (1.2/50μs)	Up	≤ 4,0 kV
Protection level at Iimp (L-N)	Up	≤ 4,0 kV
Response time	tA	< 50 ns
Lightning impulse current (10/350) L1+L2+L3+N-PE	I _{total}	100 kA
Lightning impulse current (10/350μs) [L-N]	I _{imp}	60 kA
Lightning impulse current (10/350 μs) [N-PE]	I _{imp}	100 kA
Short-circuit withstand capability at max. back-up fuse	I _k	50 kA _{eff}
Max. acceptable back-up fuse F2 (spur wiring)		160 A gL/gG
Max. acceptable back-up fuse F1 (V-wiring)		125 A gL/gG
Operating temperature range	TU	-40 - +80 °C
Max. conductor cross section		stranded 50/fine stranded 35 mm ²
Recommended conductor cross section		25 mm ²
Max. connection torque for terminals		4.0 Nm
Enclosure material / colour		polycarbonate (halogen-free) UL 94-V0 / yellow

Order Data

Product	IP B TT 60/100
Article-No.	38 11 50