



PROFIBUS PA temperature transmitter

5450D

- PROFIBUS PA profile 4.0
- RTD, TC, potentiometer, linear resistance and bipolar mV input
- Single or true dual inputs with sensor redundancy and drift detection
- Easy Ex i deployment with conformity to FISCO IEC 60079-27
- Accuracy from 0.04°C
- 2.5 kVAC galvanic isolation



Application

- Temperature measurement of a wide range of TC and RTD types.
- Conversion of wide span linear resistance and potentiometer inputs to PROFIBUS.
- Conversion of bipolar mV signals to PROFIBUS.
- Integration into asset management schemes.
- Critical applications requiring superior accuracy and/or sensor redundancy and drift detection.

Technical characteristics

- True dual input transmitter. High density 7-terminal design accepts the widest range of dual input combinations.
- Sensor drift detection - alerts when sensor differential exceeds user-defined limits, for maintenance optimization.
- Variable mapping for process data such as average, differential and min./max. tracking.
- Groundbreaking digital and analog signal accuracy over full input span and ambient conditions.
- Extensive sensor matching including Callendar Van Dusen and custom linearizations.
- Programmable input limits with runtime metering ensure maximum process traceability and sensor out of range protection.
- Meets NAMUR NE21, NE44, NE89 and NE107 compliant diagnostics information.


Programming

- PROFIBUS PA functions and device-specific parameters are configured via fieldbus communication and the associated DD / DTM / GSD device drivers.

Mounting / installation

- For DIN form B sensor head mounting.
- Mounting in zone 0, 1, 2 and zone 21, 22 including M1 / Class I, Division 1, Groups A, B, C, D.

Applications

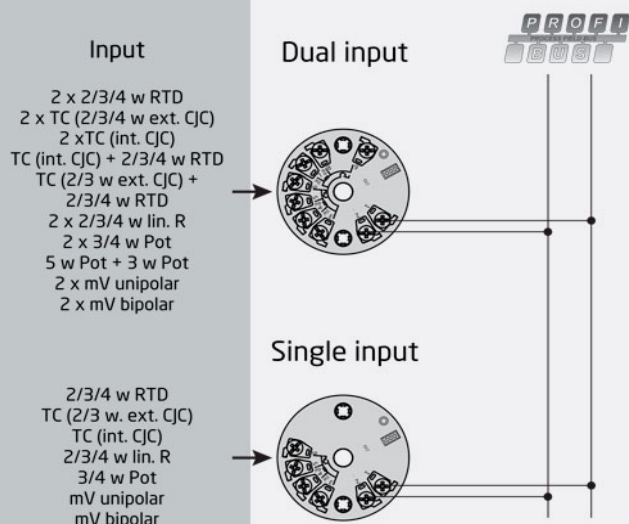

Order:

Type	Inputs	Reserved
5450D	Single input (4 terminals) : 1	:-
	Dual input (7 terminals) : 2	

Environmental Conditions

Operating temperature.....	-40°C to +80°C
Storage temperature.....	-50°C to +85°C
Calibration temperature.....	23...25°C
Relative humidity.....	< 99% RH (non-cond.)
Protection degree (encl./terminal).....	IP68 / IP00

Mechanical specifications

Dimensions.....	Ø 44 x 21.45 mm
Center hole diameter.....	Ø 6.35 mm / ¼ in
Weight approx.....	50 g
Wire size.....	1 x 1.5 mm ² stranded wire
Stripping length.....	7 mm
Screw terminal torque.....	0.4 Nm
Vibration.....	IEC 60068-2-6
2...25 Hz.....	±1.6 mm
25...100 Hz.....	±4 g

Common specifications**Supply**

Supply voltage.....	9.0...30 VDC
Supply voltage in FISCO installations.....	9.0...17.5 VDC
Internal power dissipation.....	< 352 mW

Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 42 VAC
--	-------------------

Response time

Response time.....	< 400 ms
Programmable damping.....	0...60 s
Write protection.....	Jumper
Warm-up time.....	< 5 min.
Start-up time.....	< 15 s
Programming.....	PROFIBUS GSD, DD
Signal / noise ratio.....	> 60 dB
Long-term stability, first year / 5 years.....	± 0.05% of reading / ± 0.10% of reading
Updating time, PROFIBUS.....	< 100 ms
Signal dynamics, input.....	24 bit
Accuracy.....	See manual for details
EMC immunity influence.....	< ±0.1% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1%

Input specifications**RTD input**

RTD type.....	Pt10...10000, Ni10...10000, Cu5...1000
Permissible cable resistance per wire.....	≤ 50 Ω
Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
Sensor current.....	< 0.15 mA
Sensor error detection.....	None, Shorted, Broken, Shorted or Broken

TC input

Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC).....	Constant, internal or external via a Pt100 or Ni100 sensor
Sensor error detection.....	None, Shorted, Broken, Shorted or Broken

Linear resistance input

Measurement range / min. range (span).....	0 Ω...100 kΩ / 25 Ω
Permissible cable resistance per wire.....	≤ 50 Ω
Sensor current.....	< 0.15 mA
Sensor error detection.....	None, Broken

Potentiometer input

Potentiometer min...max.....	10 Ω...100 kΩ
Measurement range / min. range (span).....	0...100% / 10%
Permissible cable resistance per wire.....	≤ 50 Ω
Sensor current.....	< 0.15 mA
Sensor error detection.....	None, Shorted, Broken, Shorted or Broken

mV input

Measurement range.....	-800...+800 mV (bipolar)
Measurement range.....	-100...1700 mV
Min. measurement range (span).....	2.5 mV
Input resistance.....	10 MΩ
Sensor error detection.....	None, Broken

Output specifications**PROFIBUS PA connection**

PROFIBUS PA protocol.....	Profile A&B, ver. 4.0 (compatible with 3.02)
PROFIBUS PA protocol standard.....	EN 50170 vol. 2
PROFIBUS PA address (at delivery).....	126
PROFIBUS PA physical layer.....	2 x function blocks, 1 / 2 transducer block(s)
PROFIBUS PA termination.....	100 Ω +1 µF

Observed authority requirements

EMC.....	2014/30/EU
ATEX.....	2014/34/EU
RoHS.....	2011/65/EU

Approvals

ATEX.....	DEKRA 24ATEX0006X
IECEX.....	Pending
CSA.....	Pending
c FM us.....	Pending
INMETRO.....	Pending
NEPSI.....	Pending
EAC Ex.....	Pending